

June 2013

Question of the Month

With the popularity of our Ke-Loops on the ever increasing rise, the question of guiding requirements comes up more frequently. It is as simple as this. Only 2 guides are required! One at the entrance and one at the exit of the loop. They need to be placed within 4X the diameter of the pipe the loop is protecting. For example, on a 4" line the guides need to be placed within 16" of the entrance and exit of the loop. As always, anchors need to be placed at any change of direction in the pipe run.



Ke-flex Ke-loops

2014 Price List

We are working on the 2014 Price List and hope to have that out at the beginning of July.


Be on the lookout for updates via email!

Year End Push!

We are rapidly approaching the end of our fiscal year, June 30th, and with everyone's help we are going to make our growth goal for 2013! Keep those orders coming!

Product Spotlight

When additional axial motion is required in large diameter piping applications, we have the product that can meet that requirement, the Dual 308/311. This product has axial motion up to 8", versus up to 4" for our standard product. This configuration saves installation time of 2 separate expansion joints. They can be supplied with a mounting base to ease installation, but please note that the mounting base does not serve as an anchor.

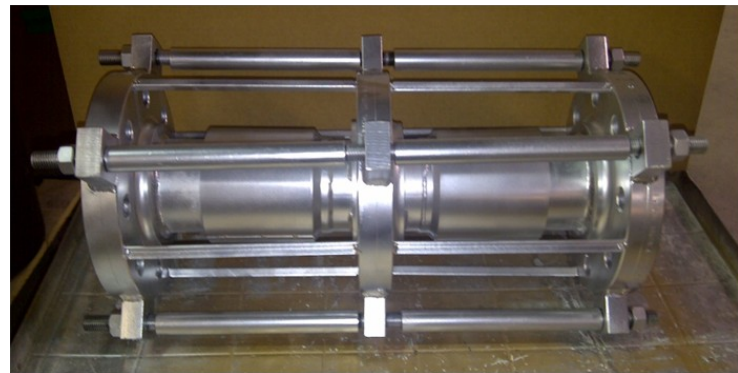

Type 311 dual expansion joint shown with 1" thick, 150# tie rod flanges.

Did you know that.....

Flex-Weld actually began as U.S. Flex. U.S. Flex was started in California way back in 1905.

Also in 1905..... Theodore Roosevelt started his first full term as President.

Las Vegas, NV is founded. ENOUGH SAID!

Your KEFLEX Team

Engineering

Don Grandt—Engineering Manager
Phone: 815-334-3631
Email: dongrandt@kelcomail.com

Customer Service

Stephanie Babineau—Acct. Specialist
Phone: 815-334-3642
Email: Sbabineau@kelcomail.com

Customer Service

Russ Leipnitz—Customer Service
Phone: 815-334-3603
Email: RLeipnitz@kelcomail.com

Product Management

Tom Rhode—Product Manager
Phone: 815-334-3620
Email: tomrhode@kelcomail.com

